

## Flow Resistance and Structures in Viscoelastic Channel Flows at Low Re

Boyang Qin<sup>1</sup>, Paul F. Salipante<sup>2</sup>, Steven D. Hudson<sup>2</sup> and Paulo E. Arratia<sup>1</sup>

<sup>1</sup>*Department of Mechanical Engineering & Applied Mechanics, University of Pennsylvania, Philadelphia, Pennsylvania 19104, USA*

<sup>2</sup>*Polymers & Complex Fluids Group, National Institute of Standards and Technology, Gaithersburg, Maryland 20899, USA*

 (Received 2 July 2018; revised manuscript received 13 January 2019; published 5 November 2019)

The flow of viscoelastic fluids in channels and pipes remains poorly understood, particularly at low Reynolds numbers. Here, we investigate the flow of polymeric solutions in straight channels using pressure measurements and particle tracking. The flow friction factor  $f_\eta$  versus flow rate exhibits two regimes: a transitional regime marked by rapid increase in drag, and a turbulentlike regime characterized by a sudden decrease in drag and a weak dependence on flow rate. Lagrangian trajectories show finite transverse modulations not seen in Newtonian fluids. These curvature perturbations far downstream can generate sufficient hoop stresses to sustain the flow instabilities in the parallel shear flow.

DOI: [10.1103/PhysRevLett.123.194501](https://doi.org/10.1103/PhysRevLett.123.194501)

Fluids containing polymers are found in everyday life (e.g., foods and cosmetics) and in technology spanning the oil, pharmaceutical, and chemical industries. A marked characteristic of polymeric fluids is that they often exhibit non-Newtonian flow behavior such as viscoelasticity [1,2]. Mechanical (elastic) stresses in such fluids are history dependent and develop with timescale  $\lambda$ , which is proportional to the time needed for a single polymer molecule to relax to its equilibrium state in dilute solutions. These stresses grow nonlinearly with shear rate and can dramatically change the flow behavior [1,2]. For example, the presence of the polymer in turbulent pipe flows can suppress eddies and leads to large reduction in flow friction [3,4]. At low Reynolds numbers (Re), where inertia is negligible, elastic stresses can lead to flow instabilities not found in ordinary fluids like water [5–12]. They can also exhibit a new type of disordered flow—elastic turbulence—a turbulentlike regime existing far below the dissipation scale [13–16].

Recently, there has been mounting evidence that the flow of viscoelastic polymeric solutions in pipe and channel flows is nonlinearly unstable and undergoes a subcritical instability at sufficiently high flow rates even at low Re [12,17–22]. We note that this nonlinear elastic instability is different from the linear instability found in highly shear-thinning fluids [23–26]; the base flow of the former is stable while the latter is unstable. Each is important in its own right. Theoretical investigations using Oldroyd-B-type model and nonlinear perturbation analysis show that a subcritical bifurcation can arise from linearly stable base states [17,19,20,27], while nonmodal stability analysis predicts transient growth of perturbation [28–30]. Subsequent experiments in small pipes found unusually large velocity fluctuations that are activated at many timescales [21], as

well as hysteretic behavior [18]. More recently, experiments in a long microchannel using a linear array of cylinders as a way to perturb the (viscoelastic) flow showed an abrupt transition to irregular flow and that the velocity fluctuations are long lived [12,22]. The unstable flow exhibits features of Newtonian turbulence such as power-law behavior in velocity spectra, intermittency flow statistics, and irregular structures in the streamwise velocity fluctuation [22]. Taken together, these results show that polymeric solutions flowing in straight channels can undergo a subcritical transition—a sudden onset of sustained velocity fluctuations above a perturbation threshold and a critical flow rate. This scenario is akin to the transition from laminar to turbulent flow of Newtonian fluids in pipe flows [31,32]. The main distinction is that the instability is caused by the nonlinear elastic stresses and not inertia. Unlike the Newtonian pipe turbulence, however, little is known about the basic structures organizing the instability and the law of resistance (i.e., pressure loss due to friction) as the flow transitions from a stable to an unstable state.

In this Letter, we investigate the flow of polymeric solutions in a straight microchannel at low Re using pressure measurements and particle tracking methods. Pressure measurements show that the flow resistance increases relative to the stable viscoelastic base flow, following the transition from a laminar to “turbulentlike” state, cf. Fig. 1(c). This behavior is analogous to Newtonian turbulence where the friction factor increases as the flow transitions from laminar to turbulent except that here the governing parameter is the Weissenberg number (Wi), defined as the product of the fluid relaxation time  $\lambda$  and the flow shear rate  $\dot{\gamma}$ . The rise in flow resistance is related to enhanced elastic stresses and suggests flow patterns not seen in the (viscoelastic) laminar regime. We find that, far

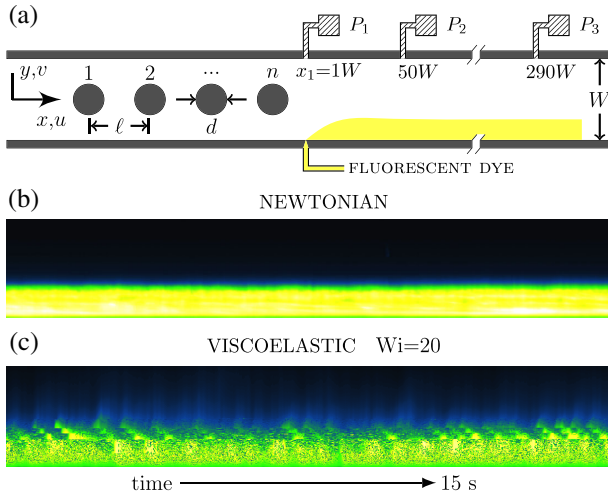


FIG. 1. (a) Schematic of the microchannel, showing location of pressure sensors and the dye injection scheme. [(b) and (c)] Spacetime dye patterns for  $n = 15$  and  $x = 200$  W in the parallel shear region, (c) viscoelastic fluid at  $Wi = 20$ , and (b) the Newtonian case at identical flow rate.

downstream from the initial perturbation, tracer particles follow wavy trajectories with spanwise modulation not found in the stable unperturbed flow (cf. Fig. 5). We believe that the increase in flow resistance is connected to the appearances of these wavy particle motions. A friction factor scaling (i.e., flow resistance vs pressure drop) for viscoelastic channel flows is proposed to capture this increase in drag.


Experiments are conducted using a straight microchannel with equal width and depth ( $W = D = 100 \mu\text{m}$ ), fabricated using standard soft-lithography methods. The device schematic is shown in Fig. 1(a). The channel length is much larger than its width  $L/W = 330$  and is divided into two regions. The first region consists of a linear array of fifteen cylinders ( $n = 15$ ) that extends for  $30$  W, with the last cylinder located at  $x = 0$ . The diameter of the cylinder is  $d = 0.5$  W and the center to center separation is  $\ell = 2$  W. An unperturbed control case with no cylinders ( $n = 0$ ) is used as the linearly stable viscoelastic case. The second region follows the array of cylinders and consists of a long parallel shear flow  $300$  W in length. To measure pressure signals, sensors are placed at three locations in the parallel shear region,  $x_1 = 1$  W,  $x_2 = 50$  W,  $x_3 = 290$  W [see Fig. 1(a)]. The pressure drop per length  $p_1(t) = (P_1 - P_2)/(x_2 - x_1)$  and  $p_2(t) = (P_2 - P_3)/(x_3 - x_2)$  is recorded at  $5$  ms resolution for over 2 hours.

The main polymeric solution is prepared by adding  $300$  ppm of polyacrylamide (PAA,  $18 \times 10^6$  MW) to a viscous Newtonian solvent (90% by mass glycerol aqueous solution); the PAA polymer overlap concentration  $c^*$  is  $350$  ppm [33] and  $c/c^* = 0.86$ . This weakly shear-thinning polymeric solution has a nearly constant viscosity of around  $\eta = 300$  mPa s. The Newtonian solvent has

constant viscosity of  $220$  mPa s and is also used for comparison. Throughout our experiment, the Reynolds number is kept below  $0.01$ , where  $Re = \rho UH/\eta$ ,  $U$  is the mean centerline velocity,  $H$  is the channel half-width, and  $\rho$  is the fluid density. We characterize the strength of the elastic stresses compared to viscous stresses by the Weissenberg number [7], defined here as  $Wi(\dot{\gamma}) = N_1(\dot{\gamma})/2\dot{\gamma}\eta(\dot{\gamma})$ , where  $\dot{\gamma} = U/H$  is the shear rate and  $N_1$  is the first normal stress difference (see Supplemental Material [34] for fluid rheology and residence time).

We begin by investigating the flow patterns formed when a stream of experimental fluid with added fluorescent dye is injected at  $x = 1$  W after the last post. The dye spreading and patterns are then visualized far downstream in the parallel shear region,  $200$  W downstream from the last post. Figure 1 shows the spatiotemporal profile of the dye intensity along the device's cross section ( $y$ ) for a channel containing  $15$  posts ( $n = 15$ ) for Newtonian [Fig. 1(b)] and viscoelastic [Fig. 1(c)] fluids. For the Newtonian case, the profile shows typical laminar dye layer with minimal dye penetration into the undyed stream, except for diffusion. (Similar behavior is observed with viscoelastic fluids for the  $n = 0$  case.) A different dye pattern is observed when the Newtonian fluid is replaced by the polymeric solution under the same conditions. The viscoelastic case, shown in Fig. 1(c) at  $Wi \approx 20$ , shows irregular flow patterns with spikes of dye penetration into the undyed fluid stream. The flow structure of streamwise velocity showed similar development downstream (Supplemental Material [34]). These fluctuations in time suggest flow modulations normal to the mean flow. In fact, we show later that particle trajectories exhibit wavy coherent motions in the parallel shear region.

As mentioned before, little is known about elastic turbulence in channel flows. Importantly, there is no known law of resistance for such flows. Here, we observe a new friction factor scaling for long chain polymeric solutions with weak shear thinning in straight channel flows. Figure 2 shows the mean pressure drop per length signals  $p_1$ ,  $p_2$  for viscoelastic fluids for  $n = 0$  and  $15$  cases as a function of flow rate  $Q$  and  $Wi$ . We note that the statistical mean of the reported signals measures the aggregate flow resistance encountered to sustain a constant mass flow rate. As expected, the pressure drop or flow resistance increases with flow rate and  $Wi$ . The pressure drop for the  $n = 0$  case slightly deviates from the Newtonian case (i.e.,  $\Delta P \sim Q$ ) due to mild shear thinning in fluid viscosity. These effects can be accounted for by estimating the pressure drop using wall shear rate and corresponding viscosity  $\eta(\dot{\gamma})$  measured using a cone-and-plate rheometer, as shown by the solid line in Fig. 2. No significant difference is found between  $p_1$  and  $p_2$  for the  $n = 0$  case as expected, since entrance effects are minimized by using a tapered inlet that generates minor disturbance relative to that of the cylinder array. For  $n = 15$ , we find a clear increase in pressure drop relative to the  $n = 0$  case; the two pressure segments  $p_1$  and  $p_2$  show

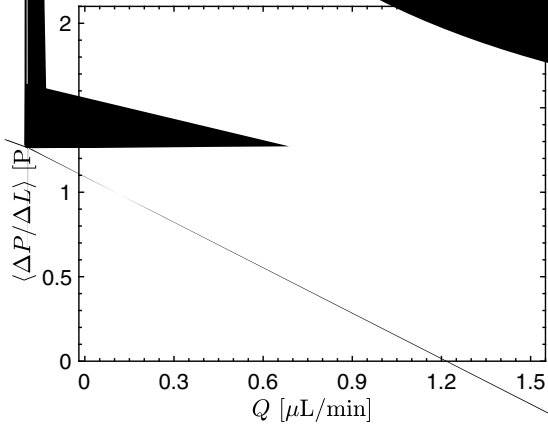


little to no difference. This increase in flow resistance cannot be explained by solely shear-thinning effects and is related to the development of additional elastic stresses in the flow as the  $Wi$  is increased. It also indicates that more energy is necessary to keep the same flow rate compared to simple viscoelastic channel flow.

This increase in flow resistance is closely associated with the onset of pressure fluctuations (Fig. 3). Figure 3(a)

they are introduced. The rms values of the pressure fluctuations of the  $p_1$  and  $p_2$  segments, respectively, as a function of  $Wi$  for the  $n = 15$  and  $n = 0$  cases. For the  $n = 0$  case, pressure fluctuations remain relatively small and nearly independent of  $Wi$ ; the small increase in pressure fluctuation at the higher values of  $Wi$  may be due to entrance effects. We find that for both segments,  $p_1'$  and  $p_2'$ , the rms values show significant departure from the stable  $n = 0$  case and a marked increase with increasing  $Wi$ . The values of the rms( $p_1'$ ) and rms( $p_2'$ ) start to depart from the  $n = 0$  trend at  $Wi \approx 9$  and grow weakly until  $Wi \approx 9$ . This is followed by a steeper growth for  $Wi \gtrsim 9$ . This trend in pressure fluctuation measurements agrees relatively well with the measurements of velocity fluctuations, for the  $n = 0$  case. It is established that the linear instability is associated with the flow around the upstream cylinder and the onset of subcritical instability.

Since pressure data are available, we investigate the law of flow resistance in channel flows as a function of  $Wi$  by measuring the Darcy friction factor  $f$  in channel flows as a function of  $Wi$ . The normalized pressure drop  $(\Delta P / \Delta L) / (\rho U_0^2)$  is plotted against the Reynolds number  $Re$  in which  $Re = \rho U_0 D / \eta$ . In which  $D$  is the channel diameter. The law of flow resistance is plotted against  $Wi$  by  $Wi = \rho U_0^2 D / G$ . The law of flow resistance is plotted against  $Wi$  by  $Wi = \rho U_0^2 D / G$ .

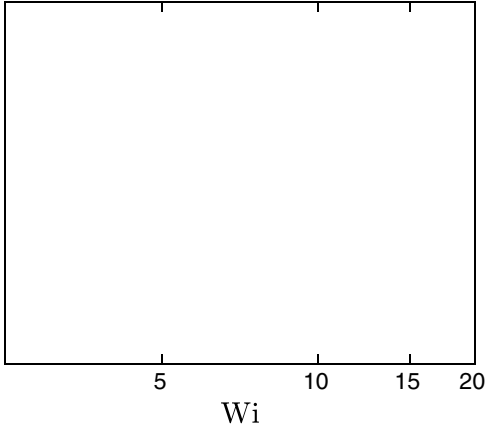

sharp increase in drag occurs during the transition regime before the flow becomes fully turbulent. We note the  $Wi^{1/3}$  scaling observed here is lower than the  $Wi^{1/2}$  scaling of injected power in the elastic turbulence of a swirling parallel plate system where the base flow is curved and linearly unstable [38].

Next, we investigate the structure of the viscoelastic flow for  $n = 15$  and  $Wi = 18$ ; this is the regime in which we expect highly irregular flow but quantifying the presence of flow structures has been difficult due to the weak spanwise velocity component relative to the mean shear [22]. To interrogate the flow with enough spatial and temporal resolution, we use a novel three-dimensional holographic particle tracking method [39,40]. The flow is seeded with tracers ( $1 \mu\text{m}$  diam at 0.001%) imaged under microscope and high speed camera (5000 fps). Using a coherent light source, particle positions are reconstructed from the light scattering field on the imaging plane (see [34]). The uncertainty in particle centroid is 30 nm for in-plane  $x$ ,  $y$  components. The measurement window is located at  $x = 200 W$  in the parallel shear region and extends for 2.5  $W$  streamwise and 0.9  $W$  spanwise.

Figure 5(a) shows sample particle trajectories for the Newtonian (grey) and viscoelastic (blue) fluids for the  $n = 15$  and  $Wi = 18$ . While the particle trajectory in the Newtonian case follows the mean flow with little lateral motion, particle trajectories in the viscoelastic fluid case display a relatively pronounced waviness and lateral movement. This is not isolated to a few particles and Fig. 5(b) shows the full extent of the spanwise spread for 2000 such Lagrangian trajectories sampled uniformly in the channel. Such wavy structures underlie the irregular dye transport patterns seen in Fig. 1(c). We quantify these deviations from the base flow by calculating the normalized distribution (pdf\*) of the ratio between transverse to

streamwise cumulative displacements [Fig. 5(c)] defined as  $\delta y/\delta x = \sum |dy_i|/\sum |dx_i|$ , where  $dy_i$  and  $dx_i$  are particle displacements between frames. The Newtonian data (black) show minimal transverse component and set the measurement noise level. Particles in the viscoelastic fluid, however, exhibit small but finite values of transverse velocity and a broader distribution of individual particle end-to-end displacement. These results indicate the presence of spanwise structures in viscoelastic fluids in parallel shear flows. While these deviations from the base flow are small in absolute terms (2% of the streamwise component), even small deviations in the velocity fields in viscoelastic fluids can represent significant increase in elastic stresses due to the nonlinear relationship between stress and velocity [41,42].

Can these curved particle trajectories drive or maintain flow instabilities far downstream (200  $W$ )? Figure 5(d) shows the distribution of particle path line curvatures at 200  $W$  for  $Wi = 18$ ,  $n = 15$ . The trajectories have a mean curvature of  $\mathcal{R}^{-1} \approx .023 \mu\text{m}^{-1}$ , which is an order of magnitude larger than the Newtonian counterpart. Using  $N_1$  data (see [34]), we compute the Pakdel-McKinley condition  $[(\lambda U/\mathcal{R})Wi]^{1/2}$  [43]. We find a value of approximately 7, which is sufficiently large to trigger flow instabilities. Similarly, we find that hoop stresses  $N_1/\mathcal{R} = 8 \text{ Pa}/\mu\text{m}$  are of the same order (or higher) than the viscous drag  $\Delta P/\Delta L|_{n=0} = 2 \text{ Pa}/\mu\text{m}$ . Hence additional pressure head is lost to overcome elastic stresses induced by the chaotic flow. These results suggest that weak but nontrivial streamline curvatures generate sufficient elastic stress fluctuations in the secondary flow direction to sustain flow instabilities far downstream.

In summary, we investigated the flow of viscoelastic fluids in a long, straight microchannel at low Re. This flow becomes unstable via a nonlinear subcritical instability at a critical Wi for finite amplitude perturbations [12]. Pressure measurements are used to establish the friction factor scaling for this flow (Fig. 4). We find two regimes: (i) a transitional regime  $5 \lesssim \text{Wi} \lesssim 9$  in which the (viscous) friction factor  $f_\eta \sim \text{Wi}^{1/3}$ , and (ii) a turbulentlike regime  $\text{Wi} \gtrsim 9$  in which a sudden reduction of  $f_\eta$  is observed followed by a weaker dependence on Wi. The increase in drag (30%, cf. laminar flow) is accompanied by an increase in pressure fluctuation and development of elastic hoop stresses due to finite spanwise curvature perturbations, which we quantify using high-resolution holographic particle tracking. Unlike the Reynolds stress in classical turbulence, the extra flow resistance here stems from elastic hoop stresses induced by curvature perturbations. Furthermore, the various levels of increased resistance for different polymeric fluid may be controlled by the distribution of such curvatures. At intermediate Re, recent studies on elastoinertial turbulence (EIT) proposed a direct path to the classic drag reduction asymptote, bypassing Newtonian turbulence [44,45]. Whether a common instability underlies these two states, elastic turbulence and EIT, remains an open question. Finally, our results provide strong evidence for the “instability upon an instability” mechanism proposed for the finite amplitude transition of viscoelastic fluids in parallel flows [19] and develop new insights into the flow of polymeric solutions in channels and pipes. Even small perturbations in the velocity field can lead to large changes in elastic stress and flow drag.

We thank Alexander Morozov, Wim van Saarloos, Rob Poole, Becca Thomases, and Michael Graham for fruitful and engaging discussions. P. E. A. and B. Q. acknowledge NSF Grant No. CBET-1336171 and S. D. H. and P. F. S. thank NIST-on-Chip funding.

---

[1] R. G. Larson, *The Structure and Rheology of Complex Fluids* (Oxford University Press, New York, 1999), Vol. 33.  
 [2] R. Bird, C. Curtiss, R. Armstrong, and O. Hassager, *Dynamics of Polymeric Liquids: Fluid Mechanics*, 2nd ed. (John Wiley & Sons, New York, 1987), Vol. 1.  
 [3] P. S. Virk, *AIChE J.* **21**, 625 (1975).  
 [4] C. M. White and M. G. Mungal, *Annu. Rev. Fluid Mech.* **40**, 235 (2008).  
 [5] S. Muller, R. Larson, and E. Shaqfeh, *Rheol. Acta* **28**, 499 (1989).  
 [6] R. G. Larson, E. S. G. Shaqfeh, and S. J. Muller, *J. Fluid Mech.* **218**, 573 (1990).  
 [7] G. H. McKinley, R. C. Armstrong, and R. A. Brown, *Proc. R. Soc. A* **344**, 265 (1993).  
 [8] A. Groisman and V. Steinberg, *Phys. Fluids* **10**, 2451 (1998).  
 [9] K. Arora, R. Sureshkumar, and B. Khomami, *J. Non-Newtonian Fluid Mech.* **108**, 209 (2002).

[10] P. E. Arratia, C. C. Thomas, J. Diorio, and J. P. Gollub, *Phys. Rev. Lett.* **96**, 144502 (2006).  
 [11] R. J. Poole, M. A. Alves, and P. J. Oliveira, *Phys. Rev. Lett.* **99**, 164503 (2007).  
 [12] L. Pan, A. Morozov, C. Wagner, and P. E. Arratia, *Phys. Rev. Lett.* **110**, 174502 (2013).  
 [13] A. Groisman and V. Steinberg, *New J. Phys.* **6**, 29 (2004).  
 [14] A. Groisman and V. Steinberg, *Nature (London)* **405**, 53 (2000).  
 [15] A. Groisman and V. Steinberg, *Nature (London)* **410**, 905 (2001).  
 [16] M. A. Fardin, D. Lopez, J. Croso, G. Grégoire, O. Cardoso, G. H. McKinley, and S. Lerouge, *Phys. Rev. Lett.* **104**, 178303 (2010).  
 [17] B. Meulenbroek, C. Storm, A. N. Morozov, and W. van Saarloos, *J. Non-Newtonian Fluid Mech.* **116**, 235 (2004).  
 [18] B. Meulenbroek, C. Storm, V. Bertola, C. Wagner, D. Bonn, and W. van Saarloos, *Phys. Rev. Lett.* **90**, 024502 (2003).  
 [19] A. N. Morozov and W. van Saarloos, *Phys. Rev. Lett.* **95**, 024501 (2005).  
 [20] A. N. Morozov and W. van Saarloos, *Phys. Rep.* **447**, 112 (2007).  
 [21] D. Bonn, F. Ingremeau, Y. Amarouchene, and H. Kellay, *Phys. Rev. E* **84**, 045301(R) (2011).  
 [22] B. Qin and P. E. Arratia, *Phys. Rev. Fluids* **2**, 083302 (2017).  
 [23] H. J. Wilson, M. Renardy, and Y. Renardy, *J. Non-Newtonian Fluid Mech.* **80**, 251 (1999).  
 [24] H. Bodiguel, J. Beaumont, A. Machado, L. Martinie, H. Kellay, and A. Colin, *Phys. Rev. Lett.* **114**, 028302 (2015).  
 [25] R. Poole, *Phys. Rev. Fluids* **1**, 041301 (2016).  
 [26] H. Barlow, E. Hemingway, A. Clarke, and S. Fielding, *J. Non-Newtonian Fluid Mech.* **270**, 66 (2019).  
 [27] A. Morozov and W. van Saarloos, *J. Stat. Phys.* **175**, 554 (2019).  
 [28] N. Hoda, M. R. Jovanovi, and S. Kumar, *J. Fluid Mech.* **601**, 407 (2008).  
 [29] M. R. Jovanovic and S. Kumar, *Phys. Fluids* **22**, 023101 (2010).  
 [30] M. R. Jovanovi and S. Kumar, *J. Non-Newtonian Fluid Mech.* **166**, 755 (2011).  
 [31] O. Reynolds, *Phil. Trans. R. Soc. London* **174**, 935 (1883).  
 [32] K. Avila, D. Moxey, A. de Lozar, M. Avila, D. Barkley, and B. Hof, *Science* **333**, 192 (2011).  
 [33] E. Pelletier, C. Viebke, J. Meadows, and P. Williams, *Langmuir* **19**, 559 (2003).  
 [34] See Supplemental Material at <http://link.aps.org/supplemental/10.1103/PhysRevLett.123.194501> for details on rheology and experimental methods, which includes Refs. [35,36].  
 [35] L. Pan and P. E. Arratia, *Microfluid. Nanofluid.* **14**, 885 (2013).  
 [36] J. J. Magda, C. S. Lee, and S. J. Muller, and R. G. Larson, *Macromolecules* **26**, 1696 (1993).  
 [37] L. F. Moody, *Trans. ASME* **66**, 671 (1944).  
 [38] Y. Jun and V. Steinberg, *Phys. Rev. Lett.* **102**, 124503 (2009).  
 [39] F. C. Cheong, B. J. Krishnatreya, and D. G. Grier, *Opt. Express* **18**, 13563 (2010).

- [40] P. F. Salipante, C. A. E. Little, and S. D. Hudson, *Phys. Rev. Fluids* **2**, 033302 (2017).
- [41] M. Alves, F. Pinho, and P. Oliveira, *J. Non-Newtonian Fluid Mech.* **97**, 207 (2001).
- [42] B. Thomases, M. Shelley, and J. Thiffeault, *Physica (Amsterdam)* **240D**, 1602 (2011).
- [43] P. Pakdel and G. H. McKinley, *Phys. Rev. Lett.* **77**, 2459 (1996).
- [44] D. Samanta, Y. Dubief, M. Holzner, C. Schäfer, A. N. Morozov, C. Wagner, and B. Hof, *Proc. Natl. Acad. Sci. U.S.A.* **110**, 10557 (2013).
- [45] G. H. Choueiri, J. M. Lopez, and B. Hof, *Phys. Rev. Lett.* **120**, 124501 (2018).